

# **RESIDENTIAL ZTRAK™ MOWERS**

Z300 SERIES / Z500 SERIES



JOHN DEERE



*It's not how fast you mow. It's how well you mow fast.™*

A woman wearing a blue t-shirt, jeans, and sunglasses is driving a green and yellow John Deere ZTRAK zero-turn mower on a green lawn. The mower has "ZTRAK" and "535M" printed on it. In the background, there are suburban houses and trees under a clear blue sky.

RESIDENTIAL ZERO TURN  
ZTRAK™ MOWERS

**THIS IS HOW TO MOW LIKE YOU MEAN IT.**

The word is spreading fast across John Deere neighborhoods all over North America. It's not how fast you mow, it's how well you mow fast.™ Words to mow by.

To help you be a part of it, our line up includes seven economical and easy-to-use Z300 Series Models. And five models in our large-framed Z500 Series Models.

The Z300 Series lineup offers Accel Deep™ Mower Deck sizes up to 54-in. (137 cm), and our Z500 Series can mow as wide as 62 inches (157 cm). Mowing well has never been easier, more cost-friendly or fast.


## TABLE OF CONTENTS

Introduction .....	2-5
Z500 Series .....	6
Z500 R Series .....	7
Z500 M Series .....	8
Z500 E Series .....	9
Z300 Series .....	10
Z300 R Series .....	11
Z300 M Series .....	12
Z300 E Series .....	13
Specifications .....	14-15

Looking for big? Don't miss the 62-in. (157 cm) Edge Cutting System Deck available on the Z535M. It's how to mow well big.

Of course, you can count on the full lineup for legendary John Deere speed, quality and durability — all standard. Every page will give you something to talk about. You really will come to see, "It's not how fast you mow. It's how well you mow fast."<sup>TM</sup>

Visit us at [JohnDeere.com](http://JohnDeere.com) or [JohnDeere.ca](http://JohnDeere.ca).

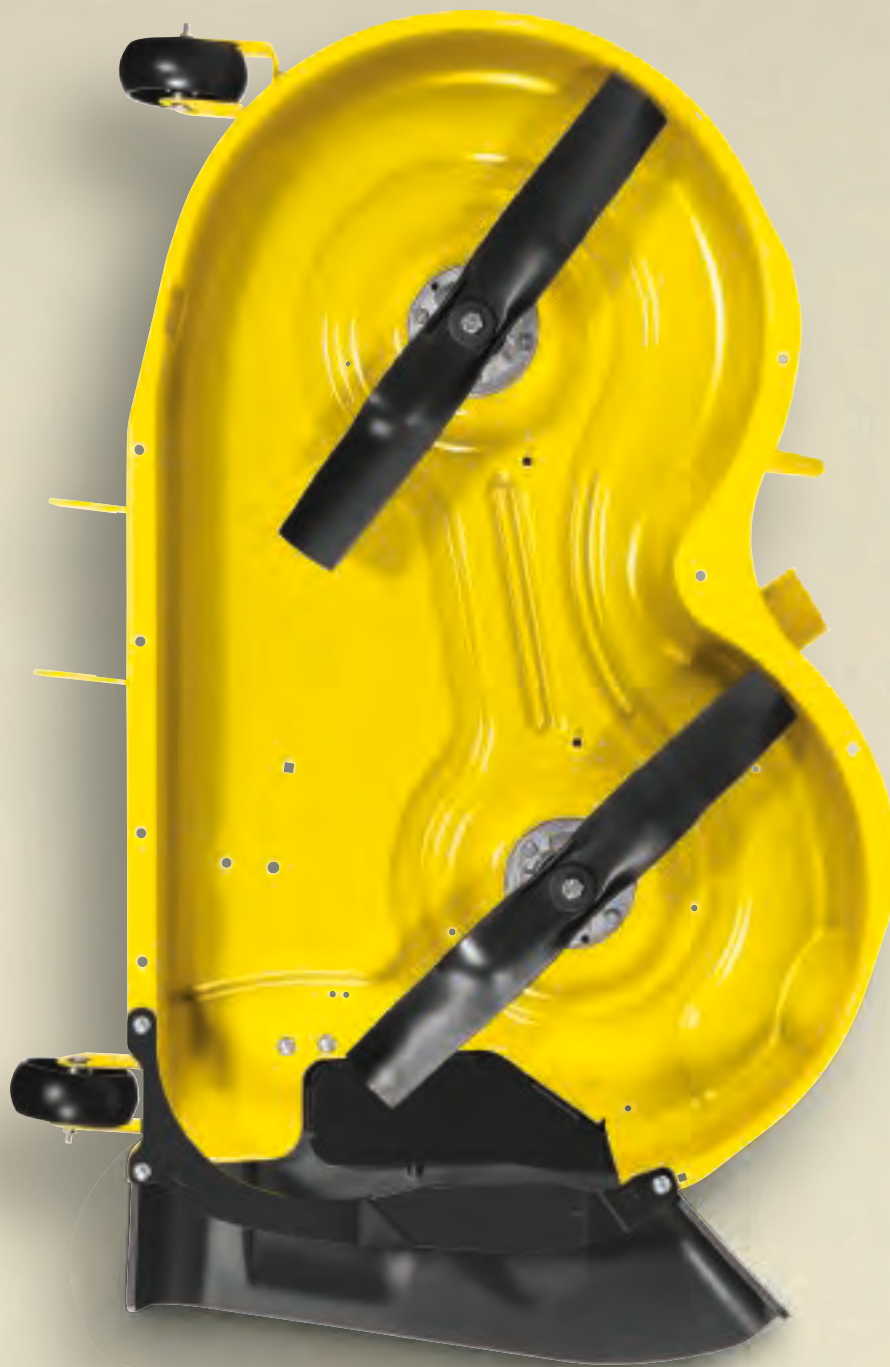

## MOWER DECKS

All of our mower decks are solid stamped out of steel to meticulous design specifications for a superior cut. The kind of cut each and every backyard deserves.

### **Accel Deep™ Mower Deck.**

The deep draw and flat top design deliver a superior quality of cut at faster ground speeds. Perfect for our ZTrak lineup.

### **The High-Capacity Mower Deck**

Stamped from 9-gauge steel, with additional deck depth for better airflow, exceptional clipping dispersal, and a premium cut.

**MulchControl™ Option.** Mulch when you want with the flip of a lever. Available with Accel Deep™ Decks and 54- (137 cm) and 60-in. (152.4 cm) High-Capacity decks.

**Edge Cutting System.** Tested and proven. Smooth underside prevents grass buildup and clumping.



**DOWN TO THE TINIEST DETAIL. DESIGNED WITH YOU IN MIND.**

Every John Deere Residential ZTrak™ mower is engineered for your comfort and overall quality. A quality cut being at the top of the list.



**On-the-go tracking adjustment.** Adjust tracking for steering and mowing straight the easy way with precision from the comfort of your seat.



**Steer with precision.** With motion control levers and two integrated transmissions.



**¾ in. height of cut adjustment.** Easily adjust from 1-4 inches (2.5-10.2 cm) in ¾-in. (.63 cm) increments for a precision cut.

## RESIDENTIAL ZERO TURN ZTRAK™ MOWERS

**Cupholders.** Perfect to keep a beverage close at hand.

**V-Twin Engine.** 20 HP\* (14.9 kW) to 25 HP\* (18.6 kW). For power, reliability, and speed.

**Control console.** Ergonomic design and color-coded for easy identification.

**Tough, dual integrated transmissions.** Smoothly go from zero to top speed quickly and stop on a dime. Over and over again.

**MulchControl™ Option.** A John Deere exclusive, mulches when you want with a flip of a lever.

**Wide rear tires.** Your overall ride is smoother and much more comfortable. Much, much more comfortable.

**Parking brake.** Easy to set. Easy to release.

**Bumper-to-Bumper Warranty\*\*.** A warranty with nothing to hide.

\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information. \*\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TUWarranty](http://www.JohnDeere.ca/TUWarranty) for details.

RESIDENTIAL Z500 SERIES  
ZERO TURN ZTRAK™ MOWERS

**THIS IS HOW CUT QUALITY AND SPEED COME FULL CIRCLE.**

Start with a superior cut. Sit down in comfort. Get a smooth ride and an 8.5-mph (13.5 km/h) or 9-mph (14.5 km/h) ground speed. And get one of the quickest, most comfortable, and efficient residential zero-turn mowers you'll find today. Leaving you with no doubt: It's not how fast you mow. It's how well you mow fast.™

# BUMPER-TO-BUMPER

## 4-YEAR/500-HOUR

### WARRANTY\*

## Z500 R SERIES AT A GLANCE

### Z535R | Z540R

**The High-Capacity Deck.**  
48-in. (122 cm), 54-in. (137 cm), and 60-in. (152.4 cm). Smooth underside processes grass at high levels. Deck depth and great airflow lifts grass for exceptional dispersal and a superior cut.

**Speed.** 9 mph (14.5 km/h) top forward ground speed.

**Muffler.** Exceptional tone quality from a commercial-style canister muffler with noise reduction over other John Deere models. Only on the Z540R.

**Standard Hitch.** Hitch up a cart and carry the day when it comes to garden beds and vegetable plots.

**The look.** The contoured panels and spoked wheels offer a sleek design. The ergonomically designed controls are all within easy reach.

**Standard floor mats**  
Help protect against muddy boots.

**Premium Control Levers**  
Ergonomic design with multiple hand placement areas for maximum comfort. Eighteen adjustment levels to accommodate tall operators.

**MulchControl™ Option.**  
Mulch when you want with the flip of a lever.

**V-Twin Engine.** The 24 HP\*\* (17.9 kW) Z540R has plenty of power. While the 25 HP\*\* (18.6 kW) Z535R has a commercial quality V-Twin Cyclonic engine.



**Fuel Tank.** The large 4.5 gallon (17 l) fuel tank is easy to access and offers a large opening for easier, mess-free filling.



**Spoked Wheels.** Offer a sleek design.



**Foot Deck Lift.** Raise and lower your mower deck with the push of a pedal.



**The 21-in. (53 cm) high-back seat.** Adjusts to your height with flip-up armrests. Large base and cross-section provides a more comfortable platform. Dymetrol® suspension offers a "cushier" base.

‡ Dymetrol is a third-party trademark used with permission. \*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TU](http://www.JohnDeere.ca/TU) Warranty for details. \*\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

## Z500 M SERIES AT A GLANCE

### Z535M / Z540M

**Speed.** 8.5 mph (13.7 km/h)  
forward ground speed.

**Accel Deep™ Mower Deck.** 48-in. (122 cm) and 54-in. (137 cm). The deep draw and flat top design create a better quality of cut at faster ground speeds.

**MulchControl™ kit option for Accel Deep™ Mower Deck.** Mulch the easy way with the flip of a lever.


**Edge Cutting System.** 62-in. (157 cm). Smooth underside prevents grass buildup and clumping. Now available on the Z535M and Z540M.

**V-Twin Engine.** The 24 HP\*\* (17.9 kW) Z540M has plenty of power, while the 25 HP\*\* (18.6 kW) Z535M has a commercial quality V-Twin Cyclonic engine.

\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TU](http://www.JohnDeere.ca/TU) Warranty for details. \*\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

**The look.** The contoured panels are sleek. The ergonomically designed, controls are all within easy reach.

**BUMPER-TO-BUMPER**  
**4-YEAR/300-HOUR**  
**WARRANTY\***

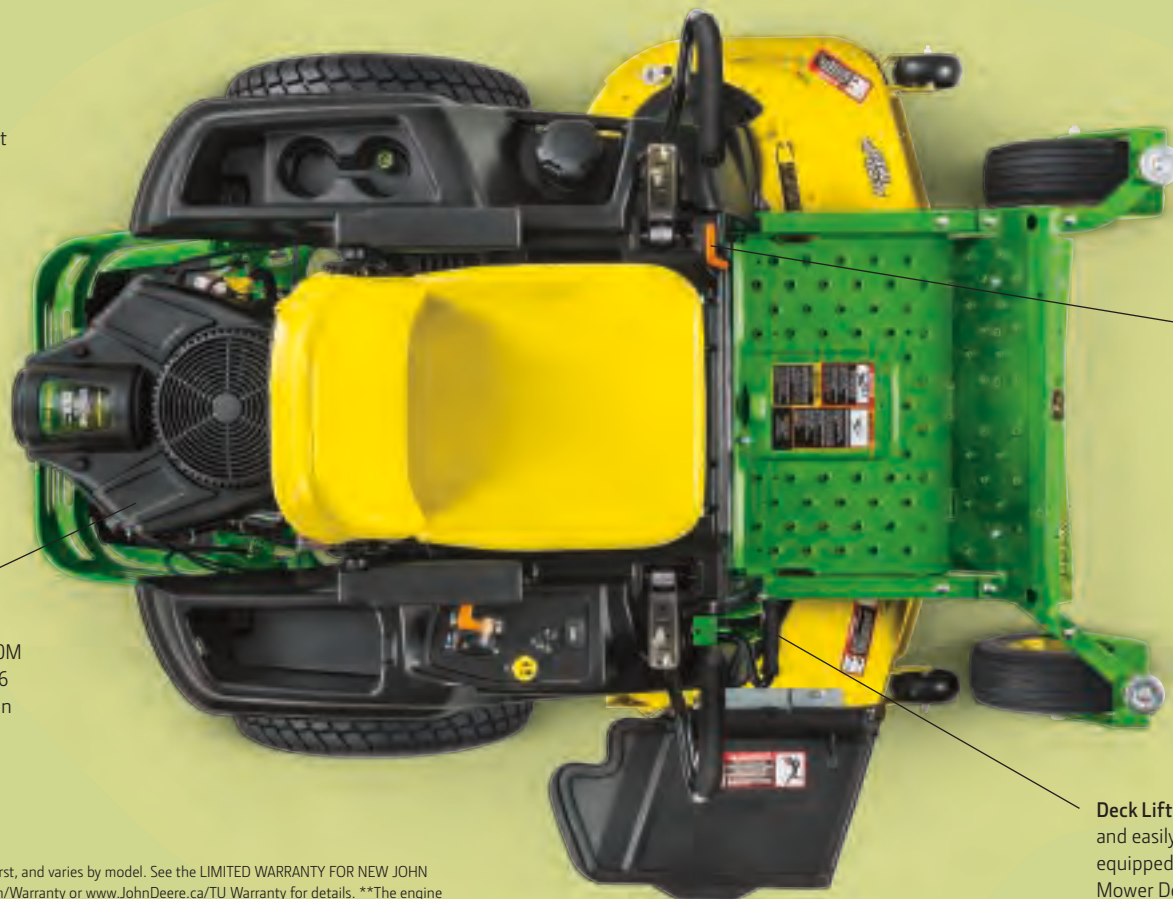

**Brake.** Set or release your brake with the lift of a lever. Easier than ever.

**Deck Lift.** Raise and lower the deck quickly and easily. Foot lift standard on Z500 M Series equipped with 62-in (157 cm) Edge Cutting System Mower Decks. Optional for all other Z500 M Series.



**The 18-in. (45.7 cm) seat.** With flip-up armrests. Height adjustable. Features suspension support for extra comfort.



**¼ in. height of cut adjustment.** Easily adjust from 1-4 inches (2.5-10.2 cm) in ¼-in. (.63 cm) increments for a precision cut.



**Fuel Tank.** The large 4.5 gallon (17 l) fuel tank is easy to access and offers a large opening for easier, mess-free filling.

# BUMPER-TO-BUMPER 2-YEAR/120-HOUR WARRANTY\*

Z500 E SERIES AT A GLANCE  
Z525E

**Mower Deck Lift.** Lower or lift your deck with ease.

**15-in. (38.1 cm) seat.** With adjustable armrests for comfort.

**On-the-go tracking adjustment.** Mow straight the easy way. The way it ought to be.

**¼ in height of cut adjustment.** Easily adjust from 1-4 inches (2.5-10.2 cm) in ¼-in. (.63 cm) increments for a precision cut.

**Wide rear tires.** Overall ride is smooth and much more comfortable.

**MulchControl™ Option.** Mulch when you want with the flip of a lever.

**Accel Deep™ Mower Deck.** 48-in. (122 cm) and 54-in. (137 cm). The deep draw and flat top design create a better quality of cut at faster ground speeds.

**Increased power.** The 24 hp\*\* (17.9 kW) engine cuts large jobs down to size.

**Speed.** 8.5 mph (13.7 km/h) ground speed.

**Brake.** Set or release your brake with the lift of a lever. Easier than ever.

**Fuel Tank.** The large 4.5 gallon (17 l) fuel tank is easy to access and offers a large opening for easier, mess-free filling.

**The look.** The contoured panels are sleek. The ergonomically designed controls are all within easy reach.

**Offset caster wheel.** Optimizes inside corner trim performance and also reduces striping.

\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com/Warranty or www.JohnDeere.ca/TU Warranty for details. \*\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

RESIDENTIAL Z300 SERIES  
ZERO TURN ZTRAK™ MOWERS

A woman with brown hair tied back, wearing sunglasses, a light blue button-down shirt, and blue jeans, is operating a green and yellow John Deere ZTRAK zero-turn mower. She is sitting on a yellow seat, holding the steering levers, and the mower is moving across a green lawn. The background consists of a dense line of green trees under a blue sky with some clouds. The mower has 'ZTRAK' and 'JOHN DEERE' branding visible on its side.

**THIS IS HOW TO MOW WELL FOR A SMALL PRICE.**

First, there is a full line of seven models, there's a lot to consider. Then there's our durable, thick frame and tough, maintenance-free dual transmission, and our skillfully engineered steering design. Count on them.

There are comfortable seats, storage for easy access to your gear, and smooth riding rear drive tires. Nice.

Add the 1- to 4-inch (2.5-10.2 cm) height-of-cut adjustment in 1/4-in. (6.3 mm) increments for a consistently superior cut with our Accel Deep™ Mower Deck and our 7 mph (11.3 km/h) forward ground speed, and you can really see why It's not how fast you mow, it's how well you mow fast™ is at home in your backyard.



**V-Twin Engine.** 22 HP\*\* (16.4 kW) for plenty of power, quick starts, reliability, and speed in the Z345R and Z355R. A 25 HP\*\* (18.6 kW) ELS engine is in the Z375R.



**Control Panel.** The ergonomically designed controls are color-coded.

## BUMPER-TO-BUMPER 4-YEAR/500-HOUR WARRANTY\*

\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TUWarranty](http://www.JohnDeere.ca/TUWarranty) for details. \*\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

## Z300 R SERIES AT A GLANCE Z345R | Z355R | Z375R

**The look.** The strong sturdy construction and ergonomic design make the Z300 R Series feel easy and approachable.

**Floor mats, standard.** Protect against muddy boots.

**Premium dual control levers.** The curved levers belong in your hands.

**Speed.** 7 mph (11.3 km/h) ground speed.

**Large front and rear tires.** Overall ride is smooth and much more comfortable.

**Tough, dual integrated transmissions.** Go from zero to top speed quickly and stop on a dime. Over and over again.

**Foot Pedal Mower Deck Lift.** Lower or lift your deck with ease.

**Accel Deep™ Mower Deck.** 42-in. (102 cm), 48-in. (122 cm), and 54-in. (137 cm). The deep draw and flat top design create a better quality of cut at faster ground speeds.

**MulchControl™ Option.** Mulch when you want with the flip of a lever.


**On-the-go tracking adjustment.** Mow straight the easy way. The way it ought to be.

**Low fuel level warning light.** Alerts you when it's time to fill up.

**Ready Start™ engine.** Choke-free and easy to start.

**17-in. (43.2 cm) seat.** Adjusts tool-free with armrests for comfort.

**25 HP\*\* Extended Life Series engine.** (Z375R) and 22 HP Intek engine (Z355R and Z345R).

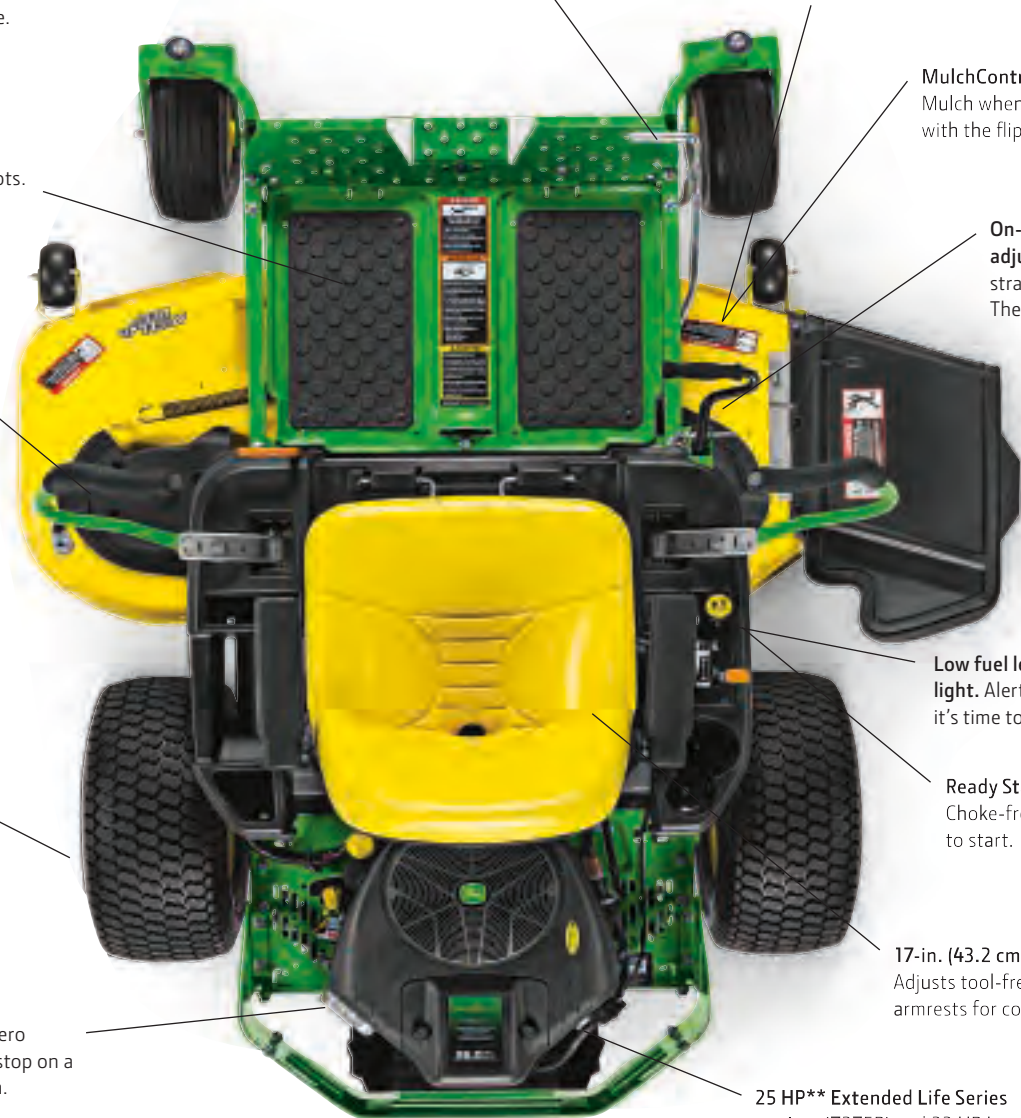

## Z300 M SERIES AT A GLANCE

### Z335M | Z345M

**The look.** The strong sturdy construction and ergonomic design make the Z300 M Series feel easy and approachable.

**Steer with precision.** Adjustable motion control levers and two integrated transmissions.

**18-in. (45.7 cm) seat.** Adjusts tool-free with armrests for comfort.

**Speed.** 7 mph (11.3 km/h) ground speed.

**Tough, dual integrated transmissions.** Go from zero to top speed quickly and stop on a dime. Over and over again.



**Accel Deep™ Mower Deck.** 42-in. (102 cm) and 48-in. (122 cm). The deep draw and flat top design create a better quality of cut at faster ground speeds.

**MulchControl™ Option.** Mulch when you want with the flip of a lever.

**On-the-go tracking adjustment.** Mow straight the easy way. The way it ought to be.

**Ready Start™ engine.** Choke-free and easy to start.

**Low fuel level warning light.** Alerts you when it's time to fill up.

**Power to spare** with the Z345M's 22 HP\*\* (16.4 kW) Intek engine or the Z335M's 20 HP\*\* (14.9 kW) engine.



**The control panel.** Ergonomic design and color-coded for easy identification.

**Throttle.** Slows you down and speeds you up.

**PTO.** Engage and disengage easily.

**Ignition Key.** Car-like and easy.



**Mower decks.** Solid stamped out of steel to meticulous design specifications for a superior cut.

**Accel Deep™ Mower Deck.** 42-in. (107 cm.) and 48-in. (122 cm). The deep draw and flat top design create a better quality of cut at faster ground speeds.

**MulchControl™ Option.** 42-in. (107 cm.) and 48-in. (122 cm). Mulch when you want with the flip of a lever.

\*\*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

**Z300 E SERIES AT A GLANCE**  
**Z335E | Z355E**

**Steer with precision.** Adjustable motion control levers and two integrated transmissions.

**V-Twin Engine.** 20 HP\*\* (14.9 kW) in the Z335E and 22 HP\*\* (16.4 kW) in the Z355E. For power, reliability and speed.

**Tough, dual integrated transmissions.** Go from zero to top speed quickly and stop on a dime. Over and over again.

**Speed.** 7 mph (11.3 km/h) ground speed.

**Wide rear tires.** Overall ride is smooth and much more comfortable.

**¼ in height of cut adjustment.** Easily adjust from 1-4 inches (2.5-10.2 cm) in ¼-in. (.63 cm) increments for a precision cut.

**Low fuel level warning light.** Alerts you when it's time to fill up.

**On-the-go tracking adjustment.** Mow straight the easy way. The way it ought to be.

**The look.** The strong sturdy construction and ergonomic design make the Z300 E Series feel easy and approachable.

**Armrests.** With 15-in. (38.1 cm) seat. Because they're comfortable. Standard on the Z355E.

**BUMPER-TO-BUMPER**  
**2-YEAR/120-HOUR**  
**WARRANTY\***

\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TUWarranty](http://www.JohnDeere.ca/TUWarranty) for details.

# ZTrak™ Series

## Specifications

		Z335E/Z355E	Z335M	Z345M	Z345R	Z355R
Engine	Horsepower*	20 hp* (14.9 kW)/22 hp* (16.4 kW)	20 hp* (14.9 kW)	22 hp* (16.4 kW)	22 hp* (16.4 kW)	22 hp* (16.4 kW)
	Model No.	M40 Intek/M44 Intek	M40 Intek	M44 Intek	M44 Intek	M44 Intek
	Displacement	40 cu in. (656 cc)/44.2 cu in. (724 cc)	40 cu in. (656 cc)	44.2 cu in. (724 cc)	44.2 cu in. (724 cc)	44.2 cu in. (724 cc)
	Cylinders	V-twin	V-twin	V-twin	V-twin	V-twin
	Replaceable Oil Filter	Yes	Yes	Yes	Yes	Yes
	Cooling Method	Air	Air	Air	Air	Air
Fuel System	Fuel Type	Gas	Gas	Gas	Gas	Gas
	Fuel Tank Capacity	2.1 U.S. gal. (8 L)	2.1 U.S. gal. (8 L)	2.1 U.S. gal. (8 L)	2.1 U.S. gal. (8 L)	2.1 U.S. gal. (8 L)
	Fuel Fill Diameter	2 in. (5.1 cm)	2 in. (5.1 cm)	2 in. (5.1 cm)	2 in. (5.1 cm)	2 in. (5.1 cm)
	Fuel Indication	Low Fuel Indicator	Low Fuel Indicator	Low Fuel Indicator	Low Fuel Indicator	Low Fuel Indicator
Electrical System	Battery Voltage	12 volt	12 volt	12 volt	12 volt	12 volt
	Cold Cranking Amps	300	300	300	300	300
	Hourmeter	Standard	Standard	Standard	Standard	Standard
Drive Train	Dual Hydros	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Hydro-Gear EZT w/1-in. (2.5 cm) axles
	Forward Speed, mph (km/h)	0-7 mph (0-11.3 km/h)	0-7 mph (0-11.3 km/h)	0-7 mph (0-11.3 km/h)	0-7 mph (0-11.3 km/h)	0-7 mph (0-11.3 km/h)
	Reverse Speed, mph (km/h)	0-3.5 mph (0-5.6 km/h)	0-3.5 mph (0-5.6 km/h)	0-3.5 mph (0-5.6 km/h)	0-3.5 mph (0-5.6 km/h)	0-3.5 mph (0-5.6 km/h)
	Speed and Direction Control	Twin levers	Twin levers	Twin levers	Twin premium levers	Twin premium levers
	Control Adjustment	2-height/18 positions	2-height/18 positions	2-height/18 positions	2-height/18 positions	2-height/18 positions
Tires	Front Caster Tires	11x4.0-5/13x5.0-6	11x4.0-5	11x4.0-5	11x4.0-5	13x5.0-6
	Drive Tires	18x8.50-8/20x9.0-10	18x8.50-8	18x8.50-8	18x8.50-8	20x9.0-10
	Rubber Floor Mat	Optional	Optional	Optional	Standard	Standard
Seat	Seat Back Height	15 in. (38.1 cm) medium-back	18 in. (45.7 cm) medium-back	18 in. (45.7 cm) medium-back	18 in. (45.7 cm) medium-back	18 in. (45.7 cm) medium-back
	Armrests	No/Yes	Yes	Yes	Yes	Yes
	Fore-aft Adjustment	2.5 in. (6.35 cm)	2.5 in. (6.35 cm)	2.5 in. (6.35 cm)	2.5 in. (6.35 cm)	2.5 in. (6.35 cm)
Lift System	Type	Hand lever, optional foot lift	Hand lever, optional foot lift	Hand lever, optional foot lift	Foot lift and hand lever standard	Foot lift and hand lever standard
PTO	Type	Electric, 105 lb-ft	Electric, 105 lb-ft	Electric, 105 lb-ft	Electric, 105 lb-ft	Electric, 105 lb-ft
	Drive	Belt	Belt	Belt	Belt	Belt
Mower Deck	Width of Cut	42 in. (107 cm)/48 in. (122 cm)	42 in. (107 cm)	42 in. (107 cm)	42 in. (107 cm)	48 in. (122 cm)
	Type	Side Discharge	Side Discharge	Side Discharge	Side Discharge	Side Discharge
	Mower Deck Material	12 gauge, 0.105 in. (2.7 mm)/10 gauge, 0.135 in. (3.4 mm)	12 gauge, 0.105 in. (2.7 mm)	12 gauge, 0.105 in. (2.7 mm)	12 gauge, 0.105 in. (2.7 mm)	10 gauge, 0.135 in. (3.4 mm)
Dimensions	Wheelbase, in. (cm)	47.5 in. (121 cm)	47.5 in. (121 cm)	47.5 in. (121 cm)	47.5 in. (121 cm)	47.5 in. (121 cm)
	Overall Length, in. (cm)	72.2 in. (183.5 cm)	72.2 in. (183.5 cm)	72.2 in. (183.5 cm)	72.2 in. (183.5 cm)	72.2 in. (183.5 cm)
	Height, in. (cm)	36.3 in. (92.2 cm)	40.1 in. (101.9 cm)	40.1 in. (101.9 cm)	40.1 in. (101.9 cm)	40.1 in. (101.9 cm)
	Weight (with mower and fuel), lb (kg)	491 lb (223 kg)/570 lb (259 kg)	496 lb (225 kg)	496 lb (225 kg)	500 lb (227 kg)	575 lb (261 kg)
Limited Warranty**		2-year/120-hour	2-year/120-hour	2-year/120-hour	2-year/120-hour	2-year/120-hour

The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

\*\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at [JohnDeere.com/Warranty](http://JohnDeere.com/Warranty) or [www.JohnDeere.ca/TUWarranty](http://www.JohnDeere.ca/TUWarranty) for details.

<b>Z375R</b>	<b>Z525E</b>	<b>Z535M</b>	<b>Z540M</b>	<b>Z535R</b>	<b>Z540R</b>
25 hp* (18.6 kW)	24 hp* (17.9 kW)	25 hp* (18.6 kW)	24 hp* (17.9 kW)	25 hp* (18.6 kW)	24 hp* (17.9 kW)
M44 ELS	M44 ELS	M44 Cyclonic	FS730V	M44 Cyclonic	FS730V
44.2 cu in. (724 cc)	44.2 cu in. (724 cc)	44.2 cu in. (724 cc)	44.3 cu in. (726 cc)	44.2 cu in. (724 cc)	44.3 cu in. (726 cc)
V-twin	V-twin	V-twin	V-twin	V-twin	V-twin
Yes	Yes	Yes	Yes	Yes	Yes
Air	Air	Air	Air	Air	Air
Gas	Gas	Gas	Gas	Gas	Gas
2.1 U.S. gal. (8 L)	4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)	4.5 U.S. gal. (17 L)
2 in. (5.1 cm)	3 in. (17.03 cm)	3 in. (7.6 cm)	3 in. (7.6 cm)	3 in. (7.6 cm)	3 in. (7.6 cm)
Low Fuel Indicator	Yes	Yes	Yes	Yes	Yes
12 volt	12 volt	12 volt	12 volt	12 volt	12 volt
300	300	300	300	300	300
Standard	Standard	Standard	Standard	Standard	Standard
Hydro-Gear EZT w/1-in. (2.5 cm) axles	Tuff Torq TZX7-D w/1-in. (2.5 cm) axles	Tuff Torq TZX7-D w/1-in. (2.5 cm) axles	Tuff Torq TZX7-D w/1-in. (2.5 cm) axles	Tuff Torq TZX7-M w/1-in. (2.5 cm) axles	Tuff Torq TZX7-M w/1-in. (2.5 cm) axles
0-7 mph (0-11.3 km/h)	0-8.5 mph (0-13.7 km/h)	0-8.5 mph (0-13.7 km/h)	0-8.5 mph (0-13.7 km/h)	0-9 mph (0-14.5 km/h)	0-9 mph (0-14.5 km/h)
0-3.5 mph (0-5.6 km/h)	0-4 mph (0-6.4 km/h)	0-4 mph (0-6.4 km/h)	0-4 mph (0-6.4 km/h)	0-4.5 mph (0-7.2 km/h)	0-4.5 mph (0-7.2 km/h)
Twin premium levers	Twin levers	Twin levers	Twin levers	Twin premium levers	Twin premium levers
2-height/18 positions	3-height/18 positions	3-height/18 positions	3-height/18 positions	3-height/18 positions	3-height/18 positions
13x5.0-6	13x5.0-6	13x5.0-6	13x5.0-6	13x6.5-6	13x6.5-6
20x9.0-10	22x9.50-10	22x9.50-10	22x9.50-10	23x10.50-12	23x10.50-12
Standard	Optional	Optional	Optional	Standard	Standard
18 in. (45.7 cm) medium-back	15 in. (38.1 cm) medium-back	18 in. (45.7 cm) medium-back	18 in. (45.7 cm) medium-back	21 in. (53 cm) high-back	21 in. (53 cm) high-back
Yes	Yes	Yes	Yes	Yes	Yes
2.5 in. (6.35 cm)	3 in. (7.6 cm) while seated	3 in. (7.6 cm) while seated	3 in. (7.6 cm) while seated	4.5 in. (11.4 cm) while seated	4.5 in. (11.4 cm) while seated
Foot lift and hand lever standard	Hand lever, optional foot lift	Hand lever, optional foot lift	Hand lever, optional foot lift	Foot lift and hand lever standard	Foot lift and hand lever standard
Electric, 105 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft
Belt	Belt	Belt	Belt	Belt	Belt
54 in. (137 cm)	48 in. (122 cm)/54 in. (137 cm)	48 in. (122 cm)/54 in. (137 cm)/ 62 in. (157 cm)	48 in. (122 cm)/54 in. (137 cm)/ 62 in. (157 cm)	54 in. (137 cm)	48 in. (122 cm)/54 in. (137 cm)/ 60 in. (152 cm)
Side Discharge	Side discharge	Side discharge	Side discharge	High capacity side discharge	High capacity side discharge
10 gauge, 0.135 in. (3.4 mm)	10 gauge, 0.135 in. (3.4 mm)	10 gauge, 0.135 in. (3.4 mm)	10 gauge, 0.135 in. (3.4 mm)	9 gauge, 0.150 in. (3.8 mm)	9 gauge, 0.150 in. (3.8 mm)
47.5 in. (121 cm)	48.7 in. (123.7 cm)	48.7 in. (123.7 cm)	48.7 in. (123.7 cm)	48.7 in. (123.7 cm)	48.7 in. (123.7 cm)
72.2 in. (183.5 cm)	76.7 in. (194.8 cm)	76.7 in. (194.8 cm)	76.7 in. (194.8 cm)	76.7 in. (194.8 cm)	76.7 in. (194.8 cm)
40.1 in. (101.9 cm)	39.4 in. (100.1 cm)	42 in. (106.7 cm)	42 in. (106.7 cm)	46.1 in. (117.1 cm)	46.1 in. (117.1 cm)
590 lb (268 kg)	615 lb (279 kg)/631 lb (286 kg)	615 lb (279 kg)/631 lb (286 kg)/ 687 lb (312 kg)	638 lb (289 kg)/654 lb (297 kg)/ 687 lb (312 kg)	710 lb (322 kg)	697 lb (316 kg)/717 lb (325 kg)/ 738 lb (335 kg)
2-year/120-hour	2-year/120-hour	4-year/300-hour	4-year/300-hour	4-year/500-hour	4-year/500-hour



**JOHN DEERE**

This literature has been compiled for worldwide circulation. While general information, pictures, and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options, and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specification, design, and price of the products described in this literature without notice. John Deere, the leaping deer symbol, and green and yellow trade dress are trademarks of Deere & Company.

